



ISSN: 2319-5967

ISO 9001:2008 Certified

International Journal of Engineering Science and Innovative Technology (IJESIT)

Volume 2, Issue 5, September 2013

# Use of Aqueous Ammonia in Silencer for removal of CO<sub>2</sub>, SO<sub>2</sub> and NO<sub>x</sub> from exhaust gases of I.C. Engines

Rawale Sudarshan S.\*, Patil Snehal S., Nandrekar Amruta A., Abhijeet S. Kabule,  
Student, KJCOEMR, Pune, Faculty, KJCOEMR, Pune

*Abstract-This paper consists of experimental research work for implementing aqueous ammonia solution as an absorber for the reduction of CO<sub>2</sub>, SO<sub>2</sub> and NO<sub>x</sub> from exhaust gases of I.C. Engines. The aqueous ammonia process can simultaneously remove CO<sub>2</sub>, SO<sub>2</sub>, NO<sub>x</sub> and also hydrocarbons that may present in the exhaust gas. There could be oxidation of SO<sub>2</sub> and NO<sub>x</sub> prior to contacting the aqueous ammonia absorbent. A concept pertaining to the ammonia/carbon dioxide reaction in an exhaust system is presented.*

**Index Terms**— Ammonia, CO<sub>2</sub>, SO<sub>2</sub>, NO<sub>x</sub>,

## I. INTRODUCTION

Reduction of green house effect gases (GHGs) has taken the attention of researchers and scientists around the globe. In recent years, these concerns have risen than ever before. The large amounts of carbon dioxide (CO<sub>2</sub>) being emitted into the atmosphere could cause severe global climate changes [2]. Recent atmospheric observations confirm that the concentration of CO<sub>2</sub> in the atmosphere has increased by nearly 30% for the last 150 years, with an accelerating trend in last year's. In 1997, world community including India accepted Kyoto Protocol. Its importance and possible implementation was emphasized in 2005. The objective was to address the problem of climate changes occurring due to human activities. Protocols were defined to follow the footwork of UN Framework Convention on Climate Change (UNFCCC) [1]. This is the largest increase observed for any decade in at least the last 200 years. From 1999 to 2005, global CO<sub>2</sub> emissions from fossil fuel increased at the rate of roughly 3% by year [9]. Through human activities, mainly due to burning of fossil fuels and by cutting down of forests adds to green house effect and rise sea level. The CO<sub>2</sub> concentration level in the atmosphere should therefore be stabilized or reduced. Following are the advantages of aqueous ammonia process for CO<sub>2</sub> separation from flue gases:

- The rate of corrosion due to ammonia is low, i.e. aqueous ammonia does not pose a corrosion problem.
- Aqueous ammonia has high loading capacity. Approximately 1.2kg of CO<sub>2</sub> can be absorbed per kg of ammonia.
- The energy requirement for ammonia regeneration is predicted to be much lower.

The major byproducts from the Aqua Ammonia Process include ammonium sulphate, Ammonium nitrate and Ammonium bicarbonate. Ammonium sulphate and Ammonium nitrate are well known fertilizers for certain crops. Ammonium bicarbonate has been utilized by certain developing countries as a crop fertilizer for over 30 years with proven results in farmland practice which enhanced crop root development and leaf growth [4]. Ammonium bicarbonate was rated by Kirk-Othmer [5] as having definite fertilizing value. Considering all these advantages of ammonia, a concept is visualized to implement ammonia as a replacement for Platinum and Iridium catalysts in mufflers or silencers. Ammonia absorbs SO<sub>2</sub>, NO<sub>x</sub>, and CO<sub>2</sub> so as to reduce the atmospheric pollution. The main advantage of this exhaust system is that the whole other systems are unaltered, so this concept can be implemented on existing automobiles too. It is currently envisioned that the aqua ammonia process can be used in automobile exhaust systems to capture all three major acid gases (SO<sub>2</sub>, NO<sub>x</sub>, and CO<sub>2</sub>) and also HF, which may be present in the flue gases.

## II. EXPERIMENTAL WORK

### a) Construction:


The designed equipment consists of three cylinders viz. the absorber, the storage cylinder and the filter. The absorber has a provision for continuous flow of aqua ammonia solution from a reservoir into the absorber in the direction opposite to that of the gas flow.

A gas spreader is provided at the outlet of the combustion chamber. The spreader is a small porous cup that confirms the dissolution of gases into the aqueous ammonia and avoids formations of big gas bubbles. The

spreader is so adjusted that it dips under a constant level of ammonia flowing. The storage cylinder serves as storage in case of rise in the level of aqueous ammonia due to pressure rise. The filter cylinder consists of gas filters so as to absorb the ammonia vapors formed due to the temperature of the exhaust gases. There is a provision of cooling these vapors and recollecting for reuse (not shown in figure). The remaining unabsorbed gases are then ejected to the atmosphere.

**b) Working:**

The exhaust gases containing SO<sub>2</sub>, NO<sub>x</sub>, and CO<sub>2</sub> from the combustion chamber enter the absorber through the spreader. A definite flow rate of aqueous ammonia is capable of absorbing maximum amount of CO<sub>2</sub> and the others. The direction of flow of aqueous ammonia is anti-parallel to that of the flue gases. There is continuous flow of aqueous ammonia as shown in the figure. The function of storage cylinder is to hold aqueous ammonia in case of rise in level due to pressure of the exhaust gases. Further the gases, flowing through the pipe and a pair of filters in the filter cylinder, are ejected to the atmosphere. The gases that are ejected to the atmosphere are found to contain 10% to 25% less carbon dioxide, carbon monoxide and hydrocarbons.

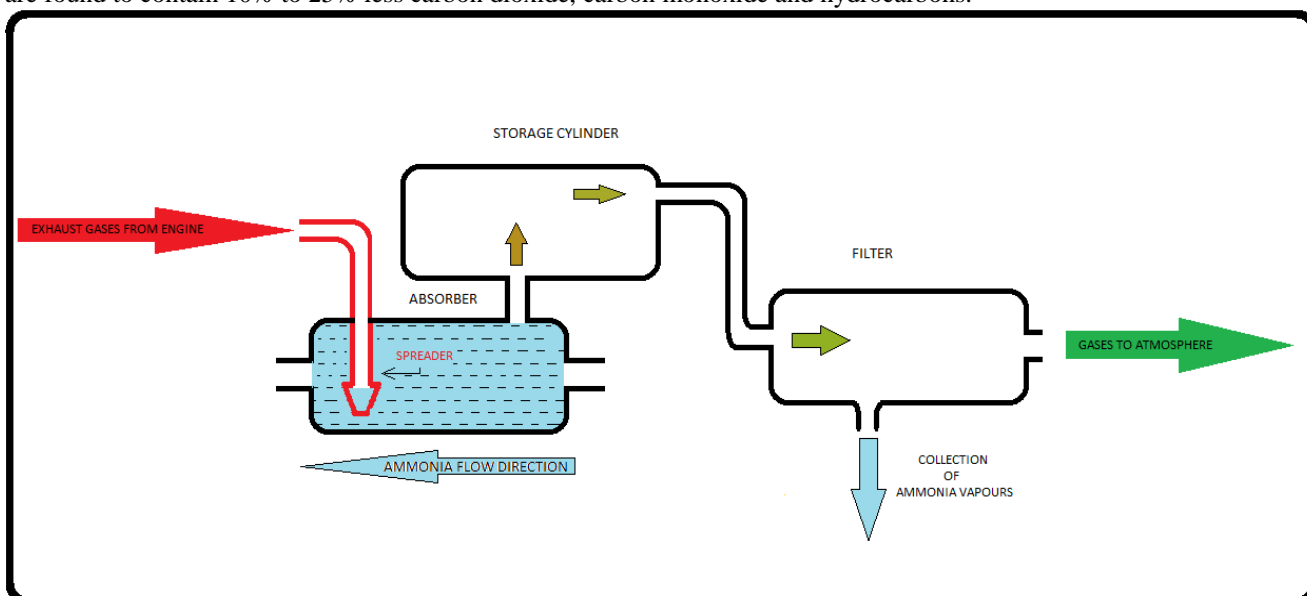

**Fig 1: Block Flow Diagram for Aqua Ammonia and Exhaust Gases**

The Elementary chemical reactions in the CO<sub>2</sub>-NH<sub>3</sub>-H<sub>2</sub>O system are shown in the following table [3]:



Equation	Process	No.
$CO_2 + NH_3 \longleftrightarrow NH_2COO^- + H^+$	formation of ammonia carbamate	(1)
$CO_2 + OH^- \longleftrightarrow HCO_3^-$	formation of bicarbonate by combination of CO <sub>2</sub> with hydroxyl ions	(2)
$HCO_3^- \longleftrightarrow CO_3^{2-} + H^+$	formation of carbonate	(3)
$NH_3 + H_2O \longleftrightarrow NH_4^+ + OH^-$	hydrolysis of ammonia	(4)
$H_2O \longleftrightarrow OH^- + H^+$	dissociation of water	(5)

**Table No.1 Reactions**

The chemical reactions that take place in the cylinders are as shown in the table. Further research work will also be done to know the exact concentration of ammonia to absorb the gases.

**c) Regeneration**

In the regeneration process aqueous ammonia, the absorption by-products are thermally decomposed to release CO<sub>2</sub> from the solution of ammonium compounds. Three potential reactions could be responsible for liberation of CO<sub>2</sub> during the thermal regeneration.






ISSN: 2319-5967

ISO 9001:2008 Certified

International Journal of Engineering Science and Innovative Technology (IJESIT)

Volume 2, Issue 5, September 2013



The heat of reaction for the process has been reported to be 20.0kcal/mol.

From Eq. 6, it is shown that ammonium bicarbonate transforms into ammonium carbonate and CO<sub>2</sub>. It has the lowest enthalpy of dissociation for CO<sub>2</sub> release. Ammonium carbonate can be further dissociated to release more CO<sub>2</sub>, but the required cost per mole of CO<sub>2</sub> is high.

**d) Discussion of results**

It was seen that the carbon dioxide content of exhaust gases was reduced by an average of 25% as compared to that of the ordinary silencer. Also reduction in the emission of gases such as nitrogen oxides was noted. Along with the above gases, absorption of hydrocarbons from the exhaust gases was seen.

### III. CONCLUSIONS

Aqua Ammonia with proper concentration can be very useful for reducing the rate of pollution from I.C. engines. Future research work will be modifications in this concept and design for efficient absorption of carbon monoxide, carbon dioxide, sulphur dioxide and nitric oxides in the ammonia solution. Work will also be conducted to determine the mechanism of the reactions involved in the absorption and regeneration reactions.

### REFERENCES

- [1] UNFCCC, "The mechanisms under the Kyoto Protocol: joint implementation, the clean development mechanism and emissions trading" (2005).
- [2] Resnik, K.P., Yeh, J.T. and Pennline, H.W., "Aqua ammonia process for simultaneous removal of CO<sub>2</sub>, SO<sub>2</sub> and NO<sub>x</sub>", Int. J. Environmental Technology and Management, Vol. 4, Nos. 1/2, pp.89–104 (2004).
- [3] WOJCIECH M. BUDZIANOWSKI, "CO<sub>2</sub> Reactive Absorption From Flue Gases Into Aqueous Ammonia Solutions: The NH<sub>3</sub> Slippage Effect", Environment Protection Engineering, Vol. 37, (2011),(P.No.4-19).
- [4] NPCC, "Study on CO<sub>2</sub> sequestration by spray concentrated aqueous NH<sub>3</sub> and production of modified NH<sub>4</sub>HCO<sub>3</sub> fertilizer – a proposal for US – China joint research", State Engineering Technology Research Center of Combustion of Power Plants (NPCC), China. (2000).
- [5] Kirk-Othmer, "Encyclopedia of Chemical Technology", 2nd edition, Vol. 2." (Ed.) (1963).
- [6] James T. Yeh, Henry W. Pennline, Kevin P. Resnik and Kathy Rygle, "Absorption and Regeneration Studies for CO<sub>2</sub> Capture by Aqueous Ammonia", Third Annual Conference on Carbon Capture & Sequestration Alexandria, VA. (May 3-6, 2004).
- [7] S. Nazir-1a, M. Tufail, W. Nisa and M. Ghauri, "Modeling for capture of carbon dioxide using aqueous ammonia from flue gases of a brick kiln", Volume 2, (June 2011).
- [8] Forster P., Ramaswamy V., Artaxo P., Berntsen T., Betts R., Fahey D.W., Haywood J., Lean J., Lowe D.C., Myhre G., Nganga J., Prinn R., Raga G., Schulz M. and Van Dorland R., "Changes in atmospheric constituents and in radioactive forcing", [In:] Climate Change 2007: The Physical Science Basis. Contribution of Working Group I to the Fourth Assessment Report of the Intergovernmental Panel on Climate Change, Cambridge University Press, Cambridge, 2007.
- [9] K. Thomsen and P. Rasmussen, "Modeling of Vapor-liquid-solid equilibrium in gas-aqueous electrolyte system", Department of Chemical Engineering, Chemical Engineering Science 54 (1999).
- [10] E. Gal, "Ultra cleaning combustion gas including the removal of CO<sub>2</sub>", World Intellectual Property, Patent WO2006022885 (2006).\



ISSN: 2319-5967

ISO 9001:2008 Certified

International Journal of Engineering Science and Innovative Technology (IJESIT)

Volume 2, Issue 5, September 2013

AUTHOR BIOGRAPHY



**RAWALE SUDARSHAN SUDHAKAR\***,  
STUDENT  
MECHANICAL ENGINEERING,  
K.J. COLLEGE OF ENGINEERING, PUNE,  
MAHARASHTRA, INDIA.  
CONTACT: +918600440014  
EMAIL: [rawalesudarshan@gmail.com](mailto:rawalesudarshan@gmail.com)



**NANDREKAR AMRUTA ANIL**  
STUDENT  
MECHANICAL ENGINEERING,  
K.J. COLLEGE OF ENGINEERING, PUNE,  
MAHARASHTRA, INDIA.  
CONTACT: +918689961118  
EMAIL: [amrutanandrekar@gmail.com](mailto:amrutanandrekar@gmail.com)



**PATIL SNEHAL SATISH**,  
STUDENT  
MECHANICAL ENGINEERING,  
K.J. COLLEGE OF ENGINEERING, PUNE,  
MAHARASHTRA, INDIA.  
CONTACT: +919970381417  
EMAIL: [snehalpatil417@gmail.com](mailto:snehalpatil417@gmail.com)



**Prof. ABHIJEET S. KABULE**,  
FACULTY,  
MECHANICAL ENGINEERING,  
K.J. COLLEGE OF ENGINEERING, PUNE,  
MAHARASHTRA, INDIA.  
CONTACT: +919922426936  
EMAIL: [abhijeet.kbl@gmail.com](mailto:abhijeet.kbl@gmail.com)